



# Rotisol

INNOVATION IN QUALITY MANUFACTURING  
FOR THE FOOD SERVICE INDUSTRY



[WWW.ROTISOLUSA.COM](http://WWW.ROTISOLUSA.COM)

MF 1375-6G-LUX



MF 975-6G-SS



MF 975-4G-LUX



MF 975-2G-SS



- ✓ Natural glass, LP glass, 208-240V systems
- ✓ Energy-saving thermal Advantage™ safety-glass
- ✓ The elegance of all-porcelain enamel or all-stainless with chrome or brass trim
- ✓ The appeal of a traditional, rustic design with visible flames & chain-driven spits
- ✓ The versatility of 6 spit choices & the vertical spit system's 9 hanging attachments



Rotisserie	Width <small>(inches)</small>	Depth <small>(inches)</small>	Height <small>(inches)</small>	Chicken capacity	Weight	Gas model Power
MF1375-6G-SS or LUX*	53 3/4	28 1/8	78 1/4 on casters	30/36 - 6	913	123,000
MF975-6G-SS or LUX*	38	28	78 1/4 on casters	12/18 - 6	717	82,000
MF1375-4G-SS or LUX*	53 3/4	28 1/8	53 3/4 ws / 83 3/4 +c	20/24 - 4	550	82,000
MF975-4G-SS or LUX*	38	28	53 3/4 ws / 83 3/4 +c	8/12 - 4	445	55,000
MF975-2G-SS or LUX*	38	28	38 5/8 ws / 68 1/2 +c	4/6 - 2	308	27,500




GF 1375-6G SPATCHKING






## Spatch KING

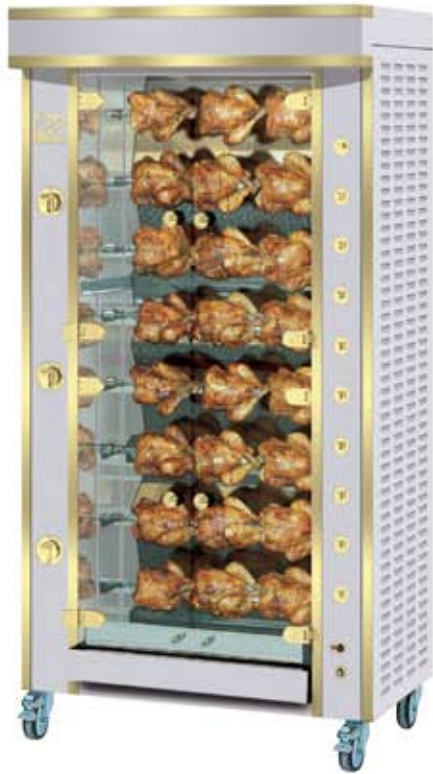


GF 1375-8G-SSP

GF 975-8G SS



-  ✓ The drama of visible flames
-  ✓ The beauty of elegant finishes
-  ✓ The functionality of a separate motor for each spit
-  ✓ Energy-saving Thermal Advantage™ safety-glass
-  ✓ Natural gas, LP gas or all-electric, 208-240V systems

	Rotisserie	Width (Inches)	Depth (Inches)	Height (Inches)	Chicken capacity	Weight	Electrical model Power	Gas model Power
	GF 1675-8G or E -SS (SSP/LUX*)	67 3/4	22 1/2	69 7/8 on casters	56/64 - 8	770	38.49	140,000
	GF 1375-8G or E -SS (SSP/LUX*)	56 1/8	22 1/2	69 7/8 on casters	40/48 - 8	660	33.19	123,000
	GF 1375-6G or E -SS (SSP/LUX*)	56 1/8	22 1/2	69 7/8 on casters	40/48 - 8	660	33.19	123,000
	GF 1375-5G or E -SS (SSP/LUX*)	56 1/8	22 1/2	45 5/8 ws / 75 5/8 +c	25/30 - 5	420	23.85	82,000
	GF 1375-2G or E -SS (SSP/LUX*)	56 1/8	22 1/2	31 1/2 ws / 61 1/2 +c	10/12 - 3	220	12.85	41,000
	GF 975-8G or E -SS (SSP/LUX*)	40 3/8	22 1/2	69 7/8 on casters	16/24 - 8	430	21.49	82,000
	GF 975-5G or E -SS (SSP/LUX*)	40 3/8	22 1/2	45 5/8 ws / 75 5/8 +c	10/15 - 5	310	15.4	55,000
	GF 975-2G or E -SS (SSP/LUX*)	40 3/8	22 1/2	31 1/2 ws / 61 1/2 +c	4/6 - 3	155	8.34	27,000



- ✓ Natural gas, LP gas or all-electric
- ✓ Separate motor and burner for each spit
- ✓ Infrared roasting with ceramic heating elements
- ✓ Compact and affordable, ideal for mobile uses and tight spaces
- ✓ Energy-saving Thermal Advantage™ safety-glass



Rotisserie	Width <small>(inches)</small>	Depth <small>(inches)</small>	Height <small>(inches)</small>	Chicken capacity	Weight	Gas model Power
FB 1400-8G or E-SS (SSP)*	54 1/8	23 1/4	70 7/8 on casters	40/48 - 8	530	121,000
FB 1400-6G or E-SS (SSP)*	54 1/8	23 1/4	51 ws / 74 7/8 +c	30/36 - 6	405	91,000
FB 1400-4G or E-SS (SSP)*	54 1/8	23 1/4	36 1/4 ws / 67 1/2 +c	20/24 - 4	310	60,500
FB 1160-8G or E-SS (SSP)*	45 1/8	23 1/4	70 7/8 on casters	32/40 - 8	430	82,000
FB 1160-6G or E-SS (SSP)*	45 1/8	23 1/4	51 ws / 74 7/8 +c	24/30 - 6	330	61,500
FB 1160-4G or E-SS (SSP)*	45 1/8	23 1/4	36 1/4 ws / 67 1/2 +c	16/20 - 4	243	41,000



FF 1425-8G-SSP



FF 1175-8G-SS



FF 1175-6G-SSP



FF 1175-4G-SS



- ✓ Natural gas, LP gas or all-electric
- ✓ Separate motor and burner for each spit
- ✓ Infrared roasting with ceramic heating elements
- ✓ Compact and affordable, ideal for mobile uses and tight spaces
- ✓ Energy-saving Thermal Advantage™ safety-glass



Rotisserie	Width <small>(inches)</small>	Depth <small>(inches)</small>	Height <small>(inches)</small>	Chicken capacity	Weight	Electric model Power	Gas model Power
FF1655-8G or E-SS*	65 1/8	26 3/8	72 5/8 on casters	48/56 - 8	662	41.84	145,000
FF1655-6G or E-SS*	65 1/8	17 3/4	50 19/32 ws / 74 1/4 +c	36/42 - 6	518	37.88	109,000
FF1425-8G or E-SS*	56 1/8	25 1/2	72 1/2 on casters	40/48 - 8	496	33.14	121,000
FF1425-6G or E-SS*	56 1/4	17 3/4	50 19/32 ws / 74 1/4 +c	30/36 - 6	375	29.98	91,000
FF1425-4G or E-SS*	56 1/4	17 3/4	37 3/4 ws / 67 3/4 +c	20/24 - 4	287	20.62	60,500
FF1175-8G or E-SS*	46 1/4	24	71 1/2 on casters	32/40 - 8	400	25.59	82,000
FF1175-6G or E-SS*	46 1/4	23 1/2	50 5/8 ws / 74 1/4 +c	24/30 - 6	300	19.53	61,500
FF1175-4G or E-SS*	46 1/4	23 1/2	36 5/8 ws / 67 3/4 +c	16/20 - 4	200	13.47	41,000

# Displays Cabinets



11MOCL4LS



11iC



BC1100



FB 1400-8G



Modules	Width <small>(inches)</small>	Depth <small>(inches)</small>	Height <small>(inches)</small>	Weight	Electrical Power	Electrical connection
BC700-FS or -SS*	27 7/8	41 1/4	56 7/8	231	2,3	208/240V
BC1100-FS or -SS*	41 1/4	41 1/4	56 7/8	310	3,45	208/240V
BC1400-FS or -SS*	54 3/8	41 1/4	56 7/8	385	4,5	208/240V
BC1700-FS or -SS*	67 3/4	41 1/4	56 7/8	475	5,7	208/240V
BC2100-FS or -SS*	81	41 1/4	56 7/8	550	6,9	208/240V
11MOCL4LS or MOCi4LS	41 1/4	29	70 7/8	508	1,53	208/240V
15iC	59 3/8	42 3/8	70	309	2,1	208/240V
11iC	43 5/8	42 3/8	70	243	1,7	208/240V



## Modular Granite Countertop



Modules	Width <small>(inches)</small>	Depth <small>(inches)</small>	Height <small>(inches)</small>	Weight	Electrical Power	Electrical connection
MGC355-R-H or -N*	14	35 1/4	8 1/4	70	1.1	208/240V
MGC700-R-H or -N*	27 7/8	35 1/4	8 1/4	155	2.1	208/240V
MGC1100-R-H or -N*	41 1/4	35 1/4	8 1/4	240	3.1	208/240V
MGC1500-R-H or -N*	54 3/8	35 1/4	8 1/4	330	4.1	208/240V
MGC-45RA-H*	46 1/8	35 1/4	8 1/4	200	2.3	208/240V
MGC-45iRA-H*	50 1/8	37 1/4	8 1/4	220	2.3	208/240V
MGC-45LA-H*	46 1/8	35 1/4	8 1/4	200	2.3	208/240V
MGC-45iLA-H*	50 1/8	37 1/4	8 1/4	220	2.3	208/240V
MGC-90-H*	67	35 1/4	8 1/4	265	3.4	208/240V

## DropIn Display Module



DI-R-H2



DI-R-R3



Modules	Width <small>(inches)</small>	Depth <small>(inches)</small>	Height <small>(inches)</small>	Weight	Electrical Power	Gas model Power
DI-R-H1	26 3/8	22 3/8	6	50	0.8	208/240V
DI-R-H2	32 3/8	22 3/8	6	64	1.0	208/240V
DI-R-H3	32 3/8	26 3/8	6	75	1.25	208/240V
DI-R-H4	38 3/8	26 3/8	6	90	1.6	208/240V
DI-R-R1	26 3/8	22 3/8	17 5/8	140	1.2	208/240V
DI-R-R2	32 3/8	22 3/8	17 5/8	155	1.2	208/240V
DI-R-R3	32 3/8	26 3/8	17 5/8	175	1.2	208/240V
DI-R-R4	38 3/8	26 3/8	17 5/8	200	1.2	208/240V

# THEY TRUST US



**Rotisol**



ROTISOL FRANCE, INC.  
415 W. Walnut St.  
GARDENA, CA 90248

info@rotisolusa.com  
Ph : 310 671 72 54  
Fax : 310 671 81 71  
www.rotisol.com



# Rotisol Accessories

Some accessories are not available for certain models or sizes.

NEW! Porchetta Spit



Prongless Anti-cutting V-Spit



Ham/Turkey Spit



Traditional Chicken Spit



Rectangular Basket Spit



Spatchcock Basket Spit



Roast Clamp Spit



Lamb/Suckling Pig Spit



Spare Rib Rack



Raised Rack



Spit Mover



Lighter



10-Spit Rolling Rack with cover



Vertical Spit System  
available for GrandFlame, MasterFlame  
& FlamBoyant rotisseries


## VERTICAL SPIT SYSTEM ACCESSORIES



S hook (meat hook)



Soup pan



Rectangular Basket



Round Basket



Basket (clamp) spit



Sausage spit



Carousel  
for small kebabs



Kebab Skewer



Large skewer  
for cockerel, pineapple, etc.



Suspended Plate



Wall rack for spits



20-spit Rolling Rack  
shown with no cover

# Rotisol COLORS

White RAL 9003	Light Gray RAL 7035 PANT 5527PC	Dark Gray RAL 7037 PANT cool gray 9PC	Anthracite RAL 7016 PANT 432PC	Charcoal RAL 7021 PANT 7547PC	Glossy/Flat Black RAL 9005 PANT 426PC	Mirror Black CS 803 PANT black 7PC	<i>On screen and printed colors are guidelines only and cannot be guaranteed to be accurate.</i>		
Pearl White RAL 1013 PANT 7499PC	Ivory RAL 1015 PANT 7500PC	Lemon RAL 1023 PANT 115PC	Saffron RAL 1017 PANT 135PC	Pollen Yellow PANT 110PC	Mustard PANT 118PC	Marmalade RAL 2011 PANT 717PC	Pumpkin PANT 1665PC	Copper PANT 7516PC	Pantone references are from Pantone Color Chart CMYK PC - solid to process.
Lavender Rose PANT 251PC	Rose RAL 3014 PANT 702PC	Scarlet Red RAL 3020 PANT 186PC	Tomato Red RAL 3013 PANT 1807PC	Ruby Red RAL 3003 PANT 194PC	Purple Red RAL 3004 PANT 195PC	Caramel PANT 174PC	Chocolate RAL 8012 PANT 478PC	Dark Chocolate RAL 8017 PANT 4975PC	
Lime PANT 389PC	Almond Green RAL 6011 PANT 7494PC	Emerald Green RAL 6001 PANT 7494PC	Leaf Green RAL 6002 PANT 7483PC	Moss Green RAL 6005 PANT 560PC	Glossy Green NFD 696/61 PANT 445PC	Dark Eggplant NFD 698/50 PANT 462PC	Eggplant RAL 4007 PANT 4449PC	Brushed Stainless Steel	
Salvia Gray PANT 5503PC	Iron Blue PANT 646PC	Turquoise PANT 7474PC	Cobalt Blue PANT 301PC	Ultramarine RAL 5002 PANT 2757PC	Sapphire RAL 5003 PANT 282PC	Blue-Gray Gloss Petrol Blue Gloss NFD 698/34 PANT 7540PC	Glossy Steel NFD 698/26 PANT warm gray 10PC	Glossy Steel NFD 698/26 PANT warm gray 10PC	

# Rotisol TERMS & CONDITIONS

## New accounts until terms are determined:

- Credit Application is to be completed for all new customers.
- Standard terms are NET 30 days, subject to credit approval.
- Special orders require a 50% deposit before the order will be put into production. The balance to be invoiced, on the terms accorded to the customer, when the order is ready for shipment.

## Accounts with approved credit:

- Stock orders: Net 30 days.
- Special orders: 50% deposit before the order is put into production. 50% balance due 30 days after the order is shipped and invoiced.

## Payment Issues:

- A finance charge of 1.5% per month will be applied on late payments.
- All legal fees that may occur in the process of collecting an outstanding balance will be at the customer's expense and responsibility.

**Freight:** F.O.B. Rotisol - Los Angeles, CA or Springfield, NJ, depending on location of the equipment.

**Lead times:** In stock items 3-10 business days - Out-of-stock items or custom orders usually 6-12 weeks

## Installation & Start-up:

Installation is not included in our prices..

All Rotisol installations should be conducted by Rotisol Authorized Service Agents.

Demo and training are available upon request. Please contact your nearest Rotisol sales professional.

## Cancelled or Revised Orders:

After production of a special order equipment has started, cancelled or revised special orders are subject to an early cancellation fee of 30% of the net invoice price.

## Return of Product:

Special orders cannot be returned. Stock products require a "return authorization code" issued by Rotisol Customer Care management prior to any return of goods. No products should be returned without a Rotisol return authorization code.

Product returned must be unused and in its original packaging, with instruction booklets and with any and all accessories. All returned product will be inspected for damage prior to any credit being issued. Any returned product which is found to be damaged, used or without its original packaging will not be credited or will be subject to restocking fees.

## Limited warranty:

Rotisol warrants its equipment to be free from defects in material and workmanship. The warranty covers original Rotisol parts for 1 year and labor for 1 year. The warranty is effective upon receipt of the merchandise. Repairs must be performed by an authorized service company and it is the responsibility of the customer to return the defective parts back to Rotisol USA within 15 days. Otherwise, the warranty will not be honored. Shipping charges for replacement parts, other than UPS Ground, will be at the customer's expense.

This warranty does not apply to damages by accident, misuse, incorrect line voltage, fire, water, or other acts of God. The use of non-original Rotisol parts voids the warranty.

This warranty does not cover glass door breakage, quartz or halogen lamps, or ceramic bricks; nor does it cover the non-mechanical parts on the equipment. This warranty does not cover granite tops.

**Price changes:** All prices are subject to change without notice.